

THREE PHASE INDUCTION MOTOR

OUTLINE DIMENSION

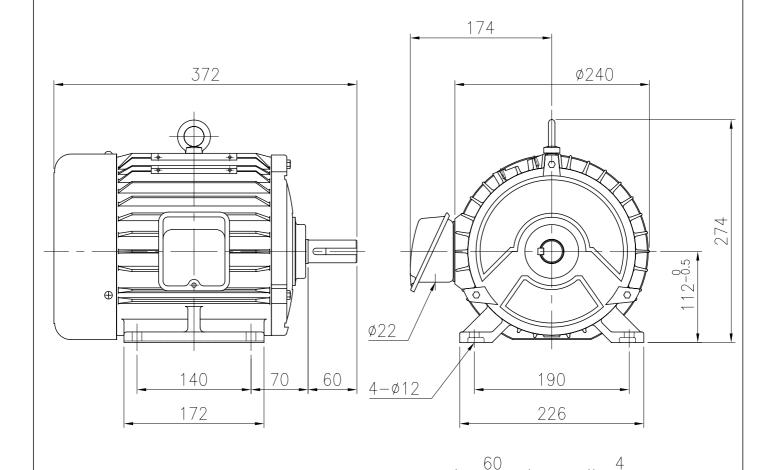

<NOTE>

- 1. TYPE: TEFC(Totally Enclosed Fan Cooled) FOOT MOUNTED TYPE
- 2. THE TOLERANCE FOR THE KEY DIMENSIONS IS IN ACCORDANCE WITH KS B 1311-84
- 3. THE TERMINAL BOX MAY BE ROTATED STEPS OF 90°



 ∞

- 4. CAST IRON FRAME AND END BRACKETS.
- 5. STAINLESS STEEL NAME PLATE WITH CONNECTION DIAGRAM.
- 6. STEEL FAN COVER AND TERMINAL BOX.

FRAME NO	OUTPUT (kW)				INS.	PRO- TEC-	RA-	BEARING NO.							
								2 P		4 P		6P / 8P		8 P	
	2P	4P	6P	8P	CLASS	TION	TING	DRIVE	OPP.D.	DRIVE	OPP.D.	DRIVE	OPP.D.	DRIVE	OPP.D.
112M	_	3.7	_	_	F	IP44	CONT	_	_	6206ZZ	6205ZZ	_	-	_	-

UNIT mm SCA	LE N PROJEC	T'N 3rd Angle	TITI.F.	OUTLINE			
DESIGNED	CHECKED	APPROVED	1111 				
2008.05.22 M.S.PARK	2008.05.22 J.H.J0	2008.05.22 H.J.KIM	SUBJECT	112M, B3			
HIGEN	Motor co	h.t.l	DWG. NO.	DW-KMI-05HK1B			